



PRODUCT SPECIFICATION

R43 SENSOR

FEATURES & BENEFITS

- **Mounting Type:** Recessed
- **Wireless:** No
- **Maximum Mounting Height:** 5m
- **Occupancy Detection:** PIR
- **Daylight Control:** Bright Out
- **Output:** On/Off
- **Supply Power Source:** 230V
- **IP Rating:** IP20
- **Programmer:** REA-R43 programmer


ADJUSTABLE PARAMETERS

- **Occupied mode:** Presence/Absence
- **Occupied Time:** Up to 30 minutes
- **Bright Out Mode:** Enabled/Disabled
- More parameters available on programmer


IMAGES



DIAGRAMS

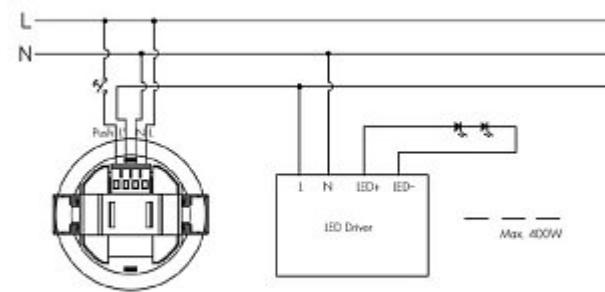

SENSOR DETECTION



ORDER CODES

Code	Description
R43	Reacta 43 Sensor, Recessed Flush Mounted Standalone, PIR, Bright Out Function, On/Off Relay
R43 SURFACE CAN	Surface mounting can for use with R43 recessed sensor